



Consommation et
Affaires commerciales Canada
Bureau des brevets
Ottawa, Canada
K1A 5C9

Consumer and
Corporate Affairs Canada
Patent Office

(21) (A1) 2,672,336
(88) 1991/03/02
(43) 1991/09/07

(51) INTL.CL. ⁵ H04B-007/19; H04B-007/26

(19) (CA) APPLICATION FOR CANADIAN PATENT (12)

(54) Networked Satellite and Terrestrial Cellular
Radiotelephone Systems

(72) Freeburg, Thomas A. - U.S.A. ;

(71) Motorola, Inc. - U.S.A. ;

(30) (US) 488,912 1990/03/06

(57) 25 Claims

BEST AVAILABLE COPY

Notice: This application is as filed and may therefore contain an
incomplete specification.

Canada

CCA 1294, 10 87, 41 7336-71-105-1254



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 :

H04B 7/19

A2

(11) International Publication Number:

WO 92/00632

(43) International Publication Date:

9 January 1992 (09.01.92)

(21) International Application Number:

PCT US91 01428

(22) International Filing Date:

1 March 1991 (01.03.91)

(30) Priority data:

488,912

6 March 1990 (06.03.90)

(31) Designated States: AT (European patent), AU, BE (European patent), BR, CA, CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), GR (European patent), HU, IT (European patent), JP, KR, LL (European patent), NL (European patent), PL, SE (European patent)

Published

Without international search report and to be republished upon receipt of that report.

(71) Applicant: MOTOROLA, INC. (US US); 1303 East Algonquin Road, Schaumburg, IL 60196 (US).

(72) Inventor: FREEBURG, Thomas, A.; 416 N. Belmont Avenue, Arlington Heights, IL 60004 (US).

(74) Agents: PARMELEE, Steven, G. et al.; Motorola, Inc., Intellectual Property Dept., 1303 East Algonquin Road, Schaumburg, IL 60196 (US)

(54) Title: NETWORKED SATELLITE AND TERRESTRIAL CELLULAR RADIOTELEPHONE SYSTEMS

(57) Abstract

There is provided a mechanism for networking satellite and terrestrial networks. It comprises: maintaining subscriber-received power levels of terrestrial network transmissions about one order of magnitude above co-channel satellite transmissions to overcome interference and maintaining subscriber transmissions to terrestrial networks at power levels about one order of magnitude of the below co-channel transmissions to satellite networks to avoid causing interference at the satellite. Such power level maintenance is provided by the network in communication with each subscriber. Moreover, a non-orbiting ("grounded") satellite cooperates as a switching node of both the satellite network and a terrestrial network to relay information between a terrestrial subscriber and the satellite radiotelephone network over a terrestrial network. The terrestrial network and the satellite network may communicate via either the inter-satellite spectrum or the terrestrial-to-satellite spectrum.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	FI	Finland	MI	Malta
BE	Belgium	FR	France	MM	Mongolia
BF	Burkina Faso	GA	Gabon	MR	Mauritania
BG	Bulgaria	GB	United Kingdom	MY	Malaysia
BJ	Benin	GN	Guinea	NL	Netherlands
BR	Brazil	GR	Greece	NO	Norway
CA	Canada	HU	Hungary	PL	Poland
CF	Central African Republic	IE	Ireland	RO	Romania
CG	Congo	JP	Japan	SD	Sudan
CH	Switzerland	KP	Democratic People's Republic of Korea	SE	Sweden
CI	Côte d'Ivoire	KR	Republic of Korea	SN	Senegal
CM	Cameroon	LI	Liechtenstein	SI	Slovenia
CS	Czechoslovakia	LN	Sri Lanka	TD	Togo
DE	Germany	LU	Luxembourg	TC	Turkey
DK	Denmark	MC	Monaco	US	United States of America

2073336

- 1 -

5 NETWORKED SATELLITE AND TERRESTRIAL CELLULAR
RADIOTELEPHONE SYSTEMS

THE FIELD OF INVENTION

10 This invention is concerned with satellite radiotelephone
communications.

More particularly, this invention is concerned with networking satellite
cellular radiotelephone networks with terrestrial radiotelephone
networks.

15 BACKGROUND OF THE INVENTION

As illustrated in Figure 1, one can envision a satellite-based cellular
radiotelephone infrastructure as consisting of a constellation of satellites
in a low Earth, polar orbit, each satellite having a number of satellite-to-
ground frequencies that illuminate hundreds to thousands of square
20 miles of global surface area. Each frequency (F3, for example) could be
reused (both from the very same satellite 102 as well as by neighboring
satellites 101), provided sufficient geographic separation is maintained to
avoid causing interference among radio-telephone subscribers (168) on
the ground. A subscriber (158) is handed off from frequency F3 to
25 frequency F1 and from satellite (102) to satellite (101) as the
constellation moves overhead. Using switch exchanges aboard the
satellite, the satellites route calls among themselves over high speed,
high bandwidth inter-satellite links (160, 161, 162) in order to globally
connect conversants on the ground (168 & 170). A more complete
30 presentation of such a satellite cellular system, is given in US Patent

2073336

- 2 -

Application S/N 263,949 to Bertiger, Satellite Cellular Telephone and Data Communication System, filed 28 October 1988 that subsequently matured into US Patent Number _____, assigned to Motorola.

- 5 Since the surface area illuminated by a single frequency is so large compared to terrestrial cellular radio-telephone systems, satellite cellular systems have far lower subscriber capacity and find limited utility in low density and rural markets; metropolitan cellular traffic is far too dense and demands much higher spectral reuse efficiency. With the high cost of
10 building, launching, operating and maintaining a satellite infrastructure, the economic viability of offering radiotelephone service via satellite depends on the ability to integrate terrestrial radio-telephone networks into satellite cellular systems.

- 15 This invention takes as its object to overcome these shortcomings and to realize certain advantages presented below.

SUMMARY OF THE INVENTION

- If the capacity of satellite-to-terrestrial links could be increased, as by "grounding" a satellite and utilizing its greater inter-satellite bandwidth, high capacity terrestrial networks could be interconnected with the
20 satellite network to provide global cellular inter-working. Metropolitan traffic would be carried by the terrestrial system, while global service would be provided everywhere else by the satellite network.

- Thus, there is provided a mechanism for networking satellite and terrestrial networks. It comprises: maintaining subscriber-received
25 power levels of terrestrial network transmissions about one order of magnitude above co-channel satellite transmissions to overcome interference and maintaining subscriber transmissions to terrestrial networks at power levels about one order of magnitude of the below co-channel transmissions to satellite networks to avoid causing interference
30 at the satellite. Such power level maintenance is provided by the network in communication with such subscriber. Moreover, a non-

2673336

- 3 -

- orbiting ("grounded") satellite cooperates as a switching node of both the satellite network and a terrestrial network to relay information between a terrestrial subscriber and the satellite radiotelephone network over a terrestrial network. The terrestrial network and the satellite network may communicate via either the inter-satellite spectrum or the terrestrial-to-satellite spectrum.

DESCRIPTION OF THE DRAWINGS

- Additional objects, features and advantages of the invention will be more clearly understood and the best mode contemplated for practicing it in its preferred embodiment will be appreciated (by way of unrestricted example) from the following detailed description, taken together with the accompanying drawings in which:

- Figure 1 is macroscopic diagram illustrating networked satellite and terrestrial cellular radiotelephone networks according to the preferred embodiment of the invention.

Figure 2 illustrates subscribers inter-working in a networked satellite and terrestrial cellular radiotelephone network according to the preferred embodiment of the invention.

DETAILED DESCRIPTION

- Figure 1 is macroscopic diagram illustrating networked satellite and terrestrial cellular radiotelephone networks according to the preferred embodiment of the invention.

- As mentioned above, a major limitation of satellite-based radiotelephone networks is that the surface area illuminated by one satellite antenna constitutes such a large cell that spectral utilization is highly inefficient when compared to terrestrial cell sizes and terrestrial cellular frequency reuse efficiencies. Each satellite cell typically is several hundred miles across due to the limited capability of satellite antenna beam-shaping. This invention increases overall spectral reuse efficiency to that of

2073336

- 4 -

terrestrial cellular, enhancing the economic feasibility of globally-integrated, cellular radiotelephone service using satellites.

This invention increases spectral efficiency through terrestrial frequency reuse of satellite-to-ground frequencies. In the metropolitan area (150) illustrated in Figure 1, four frequency sets (F1-F4, a plurality of frequencies in each set) are reused terrestrially throughout the metropolitan area with geographic separation according to the so-called four-cell reuse pattern of Graziano, US Pat No. 4,128,740, Antenna Array for a Cellular RF Communication System, assigned to Motorola. The problem associated with this terrestrial reuse of the satellite spectrum is to keep the satellite and terrestrial uses of the same frequencies from interfering with one another. According to the invention, the power of transmissions is coordinated and controlled so that those transmissions intended for the terrestrial network do not interfere with those intended for the satellite network.

To avoid interference, terrestrial transmissions are kept about 10dB higher (at the subscriber) than satellite transmissions, thereby "capturing" the subscriber's receiver. Similarly, the power of subscriber transmissions intended for terrestrial networks are kept sufficiently below those intended for satellite reception, eliminating interference at the satellite receiver. Moreover, subscriber transmissions below the sensitivity threshold of the satellite receiver will not be heard by the satellite, but would likely be heard by a terrestrial receiver of equal sensitivity, due to the differential path loss. Thus, controlling the power of terrestrial transmissions with respect to the power of satellite transmissions and accounting for satellite receiver sensitivity provides the necessary mechanism for non-interfering terrestrial reuse of satellite cellular spectrum. The apparatus required and the system control necessary for such power control is not unlike that implemented in present terrestrial cellular radiotelephone networks and subscriber radiotelephone equipment (see US Patent No. 4,523,155 to Walczak et al., assigned to Motorola, and US Patent No. 4,613,990 to Halpern).

2073336

- 5 -

Radiotelephone calling into and out of the local terrestrial service area is accomplished by "grounding" satellites to the roof tops of metropolitan structures. The "grounded" satellites use the very same (satellite-to-ground and ground-to-satellite) spectrum as the orbiting satellites (except for those frequencies in the set that might be used to provide supplemental terrestrial capacity).

Figure 2 illustrates subscribers inter-working in a networked satellite and terrestrial cellular radiotelephone networks according to the preferred embodiment of the invention. It further illustrates a satellite cellular radiotelephone network interconnected with terrestrial cellular radiotelephone networks according to the present invention. The satellite network consists of numerous satellites in low-Earth, polar orbits that sequentially pass overhead (301, 302 & 303). They communicate with subscribers on the ground via a plurality of narrow-band frequencies (F1-F4, 320 & 343) and switch the calls among each other via broadband spectrum (305 & 306) such as microwave, IR or LASER (light). The terrestrial networks illustrated (310, 311, 312, 313, 314 & 315) could represent conventional cellular radiotelephone networks, in-building local-area radio networks, LANs, public switched telephone networks, private branch exchanges or the like. Each might be coupled independently with the satellite network via a "grounded" satellite atop its building. Otherwise, they might be networked together by broadband media such as microwave links (317 & 342) or fiber (350, 351 & 352), having one "grounded" satellite (311) designated to link to the satellite network (302) via one or more of the satellite frequencies (343).

In operation, a subscriber outside the coverage of a terrestrial radiotelephone network (332) initially transmits with sufficient power to capture a satellite receiver (301) at its furthest possible trajectory. An exchange between satellite and subscriber establishes successive power levels anticipated to be used in subsequent transmissions as the satellite moves predictably overhead and then out of range. Radiotelephone calls destined to another service area are switched by

2073330

- 6 -

the originating satellite (301) via its inter-satellite links (305) to the satellite (302) presently servicing the intended recipient (330). This satellite (302) switches the call via a satellite-to-ground frequency (343) to a grounded satellite (311) atop a metropolitan structure, which, in turn, switches the call across fiber-optic links (351 & 352), point-to-point links (317), and to a terrestrial cellular network (313). The terrestrial network (313) relays the call to the subscriber at a power level some 10dB above the level of the satellite frequency (343), while the subscriber answers at a power level sufficiently below that that would interfere with signals being returned to the satellite (302). The grounded satellite's location atop tall metropolitan structures lowers the power of satellite-to-ground transmissions from that required "in-the street". Nevertheless, the satellite (302) could transmit directly to the subscriber 330 via one of the satellite frequencies (365) when extra terrestrial capacity is required; both the satellite and the subscriber would transmit at higher power -- clearly a less attractive alternative where satellite battery power and hand-portable radiotelephone battery power is concerned.

Thus, there has been provided a mechanism for interconnecting satellite and terrestrial cellular radiotelephone networks. Satellite frequencies are able to be reused terrestrially through power controlled differentials maintained between satellite transmissions and terrestrial transmissions. Spectral reuse efficiency is thereby increased. "Grounded" satellites provide the link to terrestrial networks. Seamless and global radiotelephone coverage is provided by terrestrial radiotelephone networks in metropolitan service areas and by satellite everywhere else, including those metropolitan areas without cellular service.

Although differential power control is the preferred embodiment of the invention, other methods of frequency planning would also be suitable for interconnected networks. Advantageously, the higher bandwidth inter-satellite spectrum can also be reused. The inter-satellite spectrum (305 & 306) could non-interferingly link the grounded satellites with the orbiting ones (and be reused once again between grounded satellites 317 & 342) due to the lateral directivity of inter-satellite links and the

2073336

perpendicularity of the satellite-to-ground (and ground-to-satellite links). Spectral efficiency would thereby be increased yet again.

- 5 With this higher satellite-to-ground bandwidth, the grounded satellites could either be predeterminedly and synchronously introduced into the inter-satellite inter-workings, or with predetermined and synchronous forward and backward handoffs, could be synchronously interposed in the satellite call-routing backbone and become an integral part of the satellite switching function.

- 10 Yet other frequency plans are available. Conventional terrestrial cellular radiotelephone networks utilize seven frequency sets in a hexagonal reuse pattern of one central cell ringed by six others. If four more sets were utilized to accommodate the situation where a metropolitan area fell at the intersection of four satellite cells, the available cellular spectrum could be divided into eleven sets that could be used dynamically.
- 15 synchronously and non-interferingly by frequency-agile transceivers aboard the satellites or on the ground; either the terrestrial or the satellite frequency "footprint" would have to change synchronously with each satellite's passage overhead to avoid interference. In other words, time-synchronous frequency reuse would need to be employed. Although
- 20 less preferred, this would provide no worse than 7/11's frequency reuse, not considering near-ground antenna versus 10dB path loss efficiencies. Other forms of disjoint frequency sets or satellite reuse patterns non-coincident with terrestrial patterns would provide some incremental spectral efficiencies.
- 25 For ease of understanding, the discussion has assumed Frequency Division Multiple Access FDMA channelization, but Time Division Multiple Access TDMA/FDMA implementation is contemplated in order to be compatible with emerging digital cellular standards in the US, Europe and Japan. Extension to direct sequence, spread spectrum or Code
- 30 Division Multiple Access CDMA would be equally feasible.

Thus, there has been provided a mechanism for networking satellite and terrestrial networks. It comprises: maintaining subscriber-received

2073336

- 8 -

power levels of terrestrial network transmissions about one order of magnitude above co-channel satellite transmissions to overcome interference and maintaining subscriber transmissions to terrestrial networks at power levels about one order of magnitude of the below co-channel transmissions to satellite networks to avoid causing interference at the satellite. Such power level maintenance is provided by the network in communication with such subscriber. Moreover, a non-orbiting ("grounded") satellite cooperates as a switching node of both the satellite network and a terrestrial network to relay information between a terrestrial subscriber and the satellite radiotelephone network over a terrestrial network. The terrestrial network and the satellite network may communicate via either the inter-satellite spectrum or the terrestrial-to-satellite spectrum.

While the preferred embodiment of the invention has been described and shown, it will be appreciated by those skilled in this field that other variations and modifications of this invention may be implemented. These and all other variations and adaptations are expected to fall within the ambit of the appended claims.

NETWORKED SATELLITE AND TERRESTRIAL CELLULAR RADIOTELEPHONE SYSTEMS

CLAIMS

5 What I claim and desire to secure by Letters Patent is:

1. A method of networking satellite and terrestrial networks comprising:

controlling terrestrial network transmissions with respect to
satellite transmissions to overcome interference

10 and controlling subscriber transmissions to terrestrial networks
with respect to transmissions to satellite networks to
avoid causing interference at the satellite.

15 2. A method as claimed in Claim 1, wherein such control comprises
maintaining differential power levels related to the differential path
loss between terrestrial and satellite networks.

20 3. A method as claimed in Claim 1, wherein such control comprises
maintaining differential power levels about one order of magnitude
of the differential path loss between terrestrial and satellite
networks.

25 4. A method as claimed in Claim 1, wherein such control comprises
non-interferingly partitioning of the available spectrum between
terrestrial networks and satellite networks.

5. A method as claimed in Claim 4, wherein partitioning comprises
time division multiplex channelization.



- 10 -

2073336

6. A method as claimed in Claim 4, wherein partitioning comprises code division multiplex channelization.
- 5 7. A method as claimed in Claim 4, wherein partitioning comprises frequency division multiplex channelization.
8. A method as claimed in Claim 1, wherein the available spectrum is dynamically allocated among satellite and terrestrial networks in time-synchronism with satellite movement.
- 10 9. A method as claimed in Claim 1, further comprising a non-orbiting satellite cooperating as a functional element of the satellite network.
- 15 10. A method as claimed in Claim 1, further comprising a non-orbiting satellite communicating with the satellite network via its inter-satellite spectrum.
- 20 11. A method as claimed in Claim 1, further comprising a non-orbiting satellite cooperating as a switching node of both the satellite network and a terrestrial network.
12. A method as claimed in Claim 1, wherein a non-orbiting satellite is handed off among orbiting satellites in the satellite network.

2073336

13. A method as claimed in Claim 1 wherein the terrestrial network
comprises one or more from the group of networks consisting of
terrestrial wireless networks; terrestrial wireless cellular networks
terrestrial wireless cellular radiotelephone networks; terrestrial
5 wireless in-building networks; terrestrial wireless in-building
telephone networks; terrestrial wireless in-building data networks
public switched telephone networks, private branch exchanges
and the like.
- 10 14. A method of networking satellite and terrestrial networks comprising
maintaining subscriber-received signal levels of terrestrial
network transmissions sufficiently above co-channel
satellite transmissions to overcome any interference
therebetween
- 15 and maintaining subscriber transmissions to terrestrial
networks at signal levels sufficiently below co-channel
transmissions to satellite networks to avoid causing
undo interference at the satellite

2073336

- 12 -

15. A method of networking satellite and terrestrial networks comprising:

maintaining subscriber-received power levels of terrestrial
network transmissions about one order a magnitude of
the differential path loss above co-channel satellite
transmissions to overcome any interference
therebetween

5

and maintaining subscriber transmissions to terrestrial
networks at power levels about one order a magnitude
of the differential path loss below co-channel
transmissions to satellite networks to avoid causing
undo interference at the satellite, wherein such power
level maintenance is provided by the network in
communication with such subscriber.

10

16. An apparatus for networking satellite and terrestrial networks
comprising:

15

means for maintaining subscriber-received power levels of
terrestrial network transmissions about one order a
magnitude of the differential path loss above co-channel
satellite transmissions to overcome any interference
therebetween, operatively coupled with

20

means for maintaining subscriber transmissions to terrestrial
networks at power levels about one order a magnitude
of the differential path loss below co-channel
transmissions to satellite networks to avoid causing
undo interference at the satellite, wherein such power
level maintenance is provided by the network in
communication with such subscriber.

25

- 13 - 2073336


17. A method of networking satellite and terrestrial networks comprising:
- communicating information with a subscriber over a terrestrial network
- 5 and communicating such information between the terrestrial network and an orbiting satellite that switches among a plurality of communication paths, or visa versa.
18. A method of networking satellite and terrestrial networks comprising:
- communicating information with a subscriber over a terrestrial network
- and communicating such information between the terrestrial network and an orbiting satellite cellular radiotelephone switching network, or visa versa.
19. A method of networking satellite and terrestrial networks comprising relaying information between a terrestrial subscriber and a satellite radiotelephone network via a terrestrial network.
20. A method as claimed in Claim 19, wherein relaying comprises relaying via a non-orbiting satellite that is cooperating as a functional element of the satellite network.
21. A method as claimed in Claim 19, wherein relaying comprises relaying via a non-orbiting satellite that is communicating with the satellite network via its inter-satellite spectrum.

2073335

- 14 -


22. A method as claimed in Claim 19, wherein relaying comprises relaying via a non-orbiting satellite that is cooperating as a switching node of both the satellite network and a terrestrial network.
- 5
23. A method as claimed in Claim 22, wherein a non-orbiting satellite is handed off among orbiting satellites in the satellite network.
- 10
24. A method as claimed in Claim 4, wherein spectral reuse partitioning is taken from the group consisting of: satellite-related spectrum, reused terrestrially; inter-satellite spectrum, reused terrestrially; inter-satellite spectrum, reused between terrestrial network nodes; satellite-to-ground spectrum, reused terrestrially; satellite-to-ground spectrum, reused non-interferingly terrestrially; and satellite-to-ground spectrum, reused in time-synchronism with satellite movement.
- 15
25. An apparatus for networking satellite and terrestrial networks comprising:
- 20
- means for communicating information with a subscriber over a terrestrial network, operatively coupled with
- means for communicating such information between the terrestrial network and an orbiting satellite cellular radiotelephone switching network, or visa versa.

FIG. 1

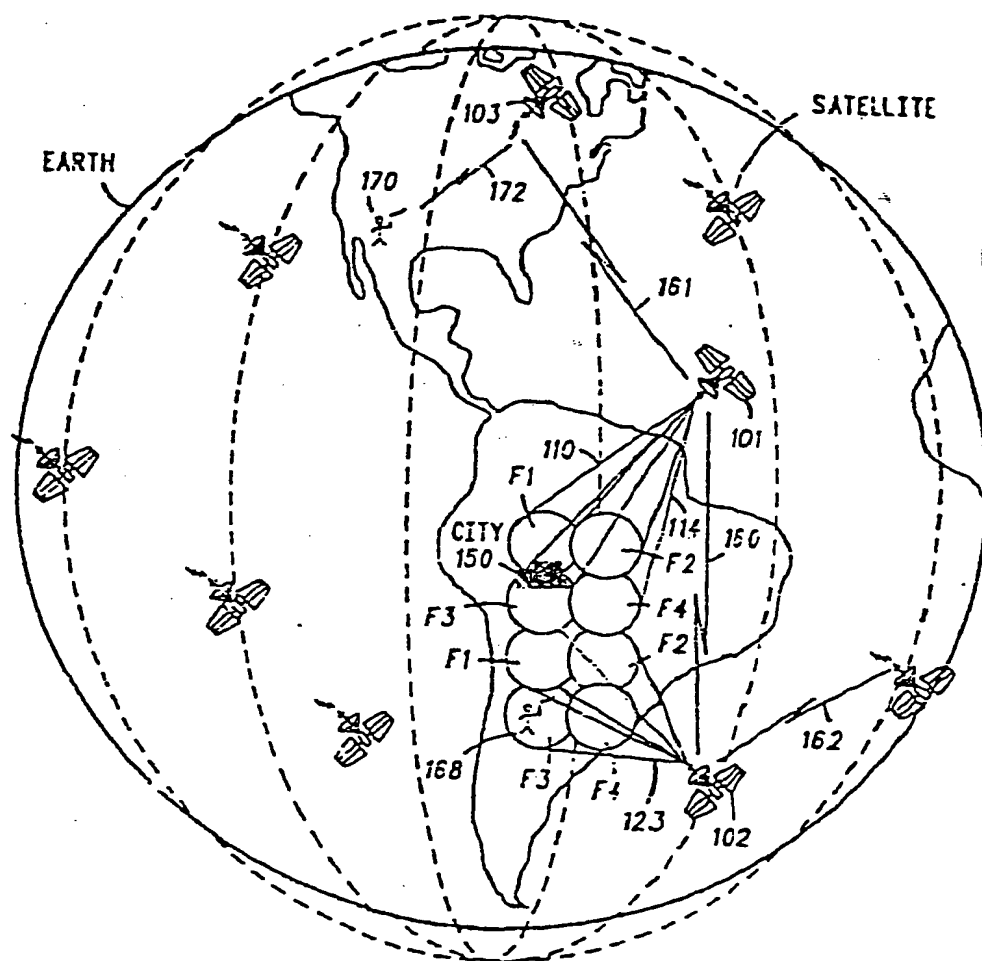

2073335

2 / 2

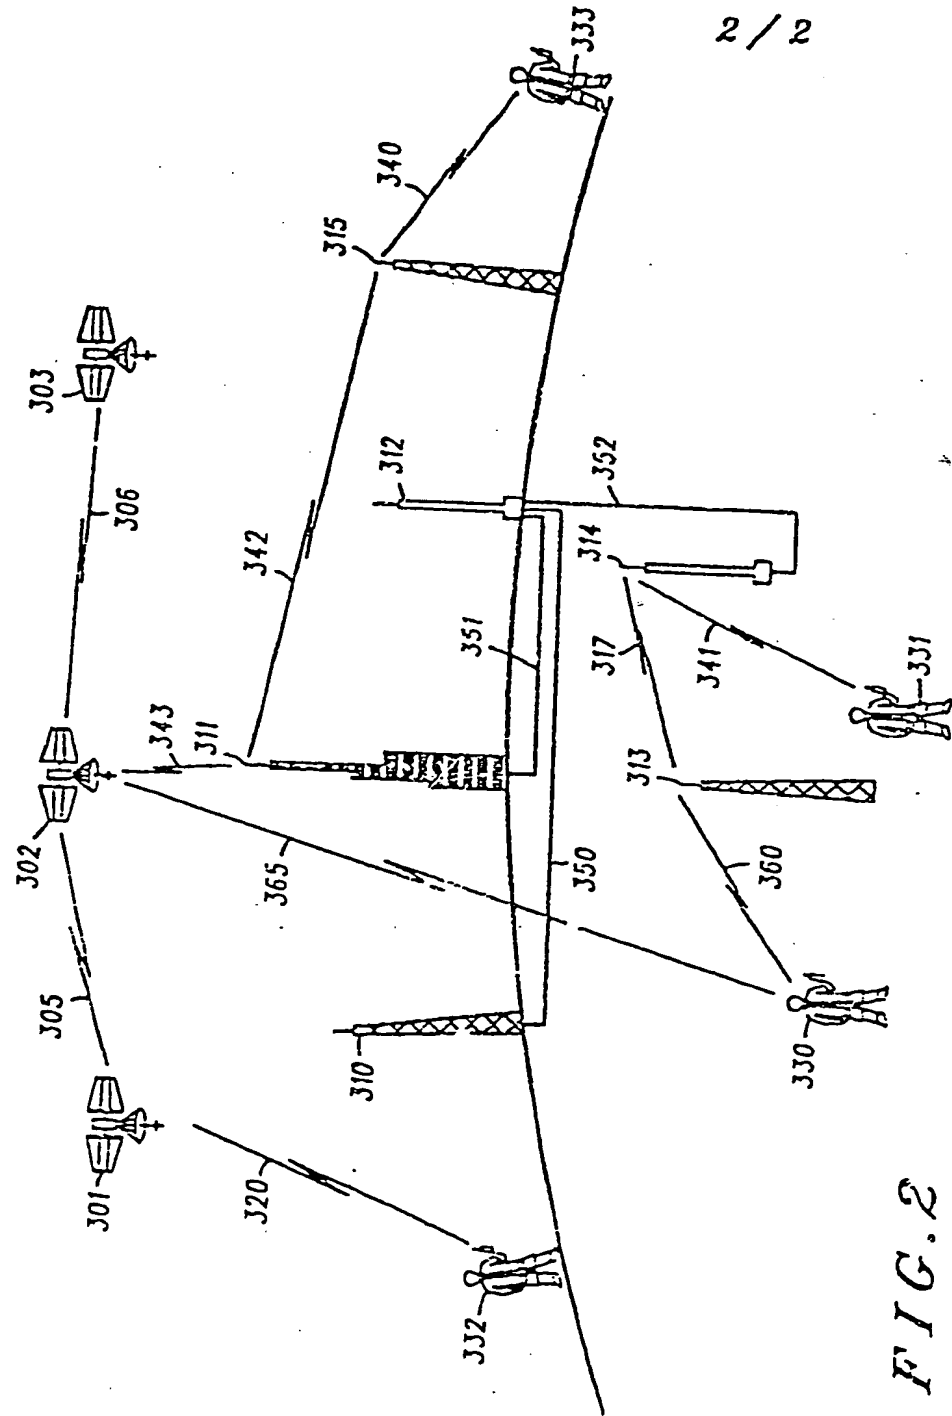

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.